


**L-BOXX holder ProSafe**

Material no.: 1000001773 | Matchcode: LB HPS VPE2 | EAN code: 4045294228613

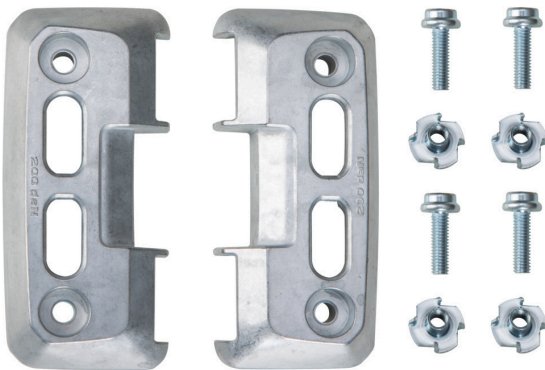

- » transport possibility for L-BOXXes & LS-BOXXes as well as i-BOXX Racks
- » several BOXXes can be stacked
- » for installation on the vehicle floor

**Materials & Colour**

Material: Aluminium  
Colour: Silver

**Dimensions**

Outer dimensions: 115 x 100 x 20 mm

**Technical data**

Weight: 0,44 kg  
Maximum load capacity: 36 kg

**Accessories**


	Material no.	Description	Matchcode	EAN code
--	--------------	-------------	-----------	----------




1000000224 Lashing strap ProSafe clamping lock 1.4 m, 250 daN PSH KS 1,4 4045294195915

## L-BOXX holder ProSafe

Material no.: 1000001773 | Matchcode: LB HPS VPE2 | EAN code: 4045294228613

	Material no.	Description	Matchcode	EAN code
	1000000222	ProSafe lashing belt clamp buckle 3 m	PSH KS 3	4045294195892

	1000000223	ProSafe lashing belt clamp buckle 6 m	PSH KS 6	4045294195908
---	------------	---------------------------------------	----------	---------------

### Description

With the L-BOXX holder ProSafe an individual or also several L-BOXXes, LS-BOXXes as well as i-BOXX Racks can be transported stacked on top of each other. In addition to your van racking system you have even more possibilities for the secure transport of your BOXXes in your loading space. When not in use, only the holders remain on the floor and the loading space is as good as completely free for other cargo.

The permissible maximum height of stacked BOXXes is 680 mm (equates a tower made up of three, e.g. L-BOXXes 102, an L-BOXX 136 and an L-BOXX 238).

The holder is designed for installation on the assembly floors SoboGrip or SoboFlex. The required fastening material is included in the scope of delivery.

The L-BOXX is positioned in between the two holders and is connected to it by means of the click system.

Furthermore, for the load securing of the BOXXes they are to be secured with the ProSafe lashing strap which can be directly hooked into the ProSafe L-BOXX holder. The lashing points have a resilience of up to 200 daN.

Two L-BOXX holders ProSafe as well as installation material are included in the scope of delivery. Depicted L-BOXXes and accessories are only for demonstration purposes.

We reserve the right to make changes in the interest of technical progress, as well as correcting printing errors and mistakes. Pictures are similar, decorative material not included. With the publication of this data sheet, previous editions lose their validity. Version: 21.12.2023